

# ÉCOLE POLYTECHNIQUE FÉDÉRALE DE LAUSANNE

School of Computer and Communication Sciences

**Handout 17**  
Homework 7

Information Theory and Coding  
Nov. 4, 2024

---

PROBLEM 1. A source produces independent, equally probable symbols from an alphabet  $(a_1, a_2)$  at a rate of one symbol every 3 seconds. These symbols are transmitted over a binary symmetric channel which is used once each second by encoding the source symbol  $a_1$  as 000 and the source symbol  $a_2$  as 111. If in the corresponding 3 second interval of the channel output, any of the sequences 000, 001, 010, 100 is received,  $a_1$  is decoded; otherwise,  $a_2$  is decoded. Let  $\epsilon < 1/2$  be the channel crossover probability.

- (a) For each possible received 3-bit sequence in the interval corresponding to a given source letter, find the probability that  $a_1$  came out of the source given that received sequence.
- (b) Using part (a), show that the above decoding rule minimizes the probability of an incorrect decision.
- (c) Find the probability of an incorrect decision (using part (a) is not the easy way here).
- (d) If the source is slowed down to produce one letter every  $2n + 1$  seconds,  $a_1$  being encoded by  $2n + 1$  0's and  $a_2$  being encoded by  $2n + 1$  1's. What decision rule minimizes the probability of error at the decoder? Find the probability of error as  $n \rightarrow \infty$ .

PROBLEM 2. Consider two discrete memoryless channels. The first channel has input alphabet  $\mathcal{X}$ , output alphabet  $\mathcal{Y}$ ; the second channel has input alphabet  $\mathcal{Y}$  and output alphabet  $\mathcal{Z}$ . The first channel is described by the conditional probabilities  $P_1(y|x)$  and the second channel by  $P_2(z|y)$ . Let the capacities of these channels be  $C_1$  and  $C_2$ . Consider a third memoryless channel described by probabilities

$$P_3(z|x) = \sum_{y \in \mathcal{Y}} P_2(z|y)P_1(y|x), \quad x \in \mathcal{X}, z \in \mathcal{Z}.$$

- (a) Show that the capacity  $C_3$  of this third channel satisfies

$$C_3 \leq \min\{C_1, C_2\}.$$

- (b) A helpful statistician preprocesses the output of the first channel by forming  $\tilde{Y} = g(Y)$ . He claims that this will strictly improve the capacity.
  - (b1) Show that he is wrong.
  - (b2) Under what conditions does he not strictly decrease the capacity?

PROBLEM 3. Consider a random source  $\mathcal{S}$  of information, and let  $W$  be a random variable which represents the first  $L$  symbols  $U_1, \dots, U_L$  of this source, i.e.,  $W = U_1^L$ . We want to transmit the value of  $W$  using a memoryless stationary channel as follows:

- At time  $t = 1$ , we send  $X_1 = f_1(W)$  through the channel.

- At time  $t = i + 1 \leq n$ , we send  $X_{i+1} = f_i(W, Y^i)$  through the channel.  $Y_1, \dots, Y_i$  are the output of the channel at times  $t = 1, \dots, i$  respectively,

$f_1, \dots, f_n$  are  $n$  mappings that constitute the encoder. Clearly, this is a communication system with feedback as we are using the value of  $Y^i$  in the computation of  $X_{i+1}$ .

In the previous problem, we gave an example which satisfies  $I(X^n; Y^n) > nC$  and  $I(W; Y^n) \leq nC$ . Show that the inequality  $I(W; Y^n) \leq nC$  always holds by justifying each of the following equalities and inequalities:

$$\begin{aligned}
 I(W; Y^n) &\stackrel{(a)}{=} \sum_{i=1}^n I(W; Y_i | Y^{i-1}) \stackrel{(b)}{\leq} \sum_{i=1}^n I(W, Y^{i-1}; Y_i) \stackrel{(c)}{\leq} \sum_{i=1}^n I(W, X_i, X^{i-1}, Y^{i-1}; Y_i) \\
 &\stackrel{(d)}{=} \sum_{i=1}^n I(X_i, X^{i-1}, Y^{i-1}; Y_i) \stackrel{(e)}{=} \sum_{i=1}^n I(X_i; Y_i) \stackrel{(f)}{\leq} nC.
 \end{aligned}$$

Since  $I(W; Y^n)$  represents the amount of information that is shared with the receiver, the inequality  $I(W; Y^n) \leq nC$  shows that feedback does not increase the capacity.


**PROBLEM 4.** *Channels with memory have higher capacity.* Consider a binary symmetric channel with  $Y_i = X_i \oplus Z_i$ , where  $\oplus$  is mod 2 addition, and  $X_i, Y_i \in \{0, 1\}$ .

Suppose that  $\{Z_i\}$  has constant marginal probabilities  $\Pr\{Z_i = 1\} = p = 1 - \Pr\{Z_i = 0\}$ , but that  $Z_1, Z_2, \dots, Z_n$  are not necessarily independent. Assume that  $(Z_1, \dots, Z_n)$  is independent of the input  $(X_1, \dots, X_n)$ . Let  $C = \log 2 - H(p, 1 - p)$ . Show that

$$\max_{p_{X_1, X_2, \dots, X_n}} I(X_1, X_2, \dots, X_n; Y_1, Y_2, \dots, Y_n) \geq nC.$$

**PROBLEM 5.** Consider two discrete memoryless channels. The input alphabet, output alphabet, transition probabilities and capacity of the  $k$ 'th channel is given by  $\mathcal{X}_k, \mathcal{Y}_k, p_k$  and  $C_k$  respectively ( $k = 1, 2$ ). The channels operate independently. A communication system has access to both channels, that is, the effective channel between the transmitter and receiver has input alphabet  $\mathcal{X}_1 \times \mathcal{X}_2$ , output alphabet  $\mathcal{Y}_1 \times \mathcal{Y}_2$  and transition probabilities  $p_1(y_1|x_1)p_2(y_2|x_2)$ . Find the capacity of this channel.

**PROBLEM 6.** Consider the following symmetric channel with binary input that maps to a ternary output. (A channel that may either flip or erase the transmitted symbol.)

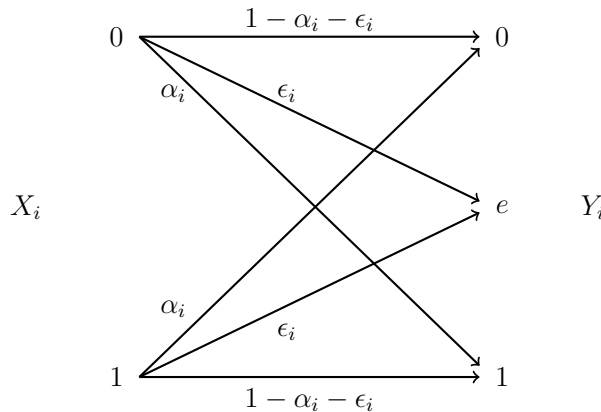

In other words,

$$p_i(y_i|0) = \begin{cases} 1 - \alpha_i - \epsilon_i, & y_i = 0 \\ \epsilon_i, & y_i = e \\ \alpha_i, & y_i = 1 \end{cases} \quad \alpha_i, \epsilon_i \in [0, 1], \quad \alpha_i + \epsilon_i \leq 1$$

and vice versa for  $p_i(y_i|1)$ . Also,  $Y_i$ 's are independent of each other given  $X_i$ 's. (i.e.  $p(y_1^n|x_1^n) = \prod_{i=1}^n p_i(y_i|x_i)$  for any  $n \geq 1$ ).

- (a) Suppose the channel is not time varying, that is  $\alpha_i = \alpha$  and  $\epsilon_i = \epsilon$ . Find the capacity  $C = \max_{p(x)} I(X; Y)$
- (b) What are the special cases when  $\alpha = 0, \epsilon \neq 0$  and  $\alpha \neq 0, \epsilon = 0$ ? What happens when  $\alpha + \epsilon = 1$ ?
- (c) Now, suppose that the channel is time varying, that is, for each channel use  $\alpha_i$ 's and  $\epsilon_i$ 's differ. Find  $\max_{p(x_1^n)} I(X_1^n; Y_1^n)$ .